

# LFT-153DO Product Specification


编辑 Edit :LJJ

审核 Review: Bill


版本 Version: A0

日期 Date:20260730

FRONT VIEW

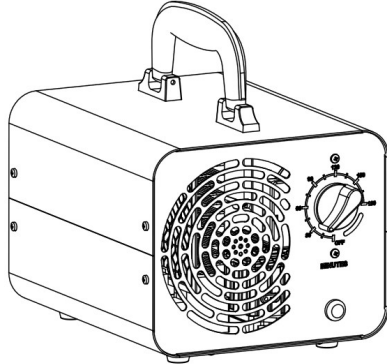

BACK VIEW

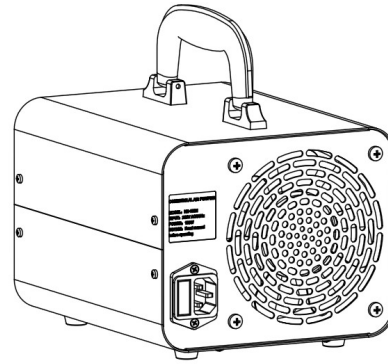

## 1. 技术参数 Technical Specifications:

|                                            |                                            |
|--------------------------------------------|--------------------------------------------|
| 型号 Model:                                  | LFT-153DO/DZ                               |
| 功能 Function:                               | Mechanical Timer                           |
| 定时器 Timer:                                 | Timer, 0-180 Minutes                       |
| 控制界面 Control Interface ( LCD / APP/WIFI ): | N/A                                        |
| 输入电压 Input Voltage:                        | 110-120V/60Hz or 220-240V/50Hz             |
| 额定功率 Rated Power:                          | 120 W                                      |
| 陶瓷片尺寸 Ozone Plate Size:                    | 90X110 Mm 1Pc (Fixed)                      |
| 风量 AirFlow:                                | Max 106 CFM                                |
| 臭氧产量 Ozone Output:                         | 10000 Mg/h                                 |
| 适用面积 Applicable Area:                      | 300 m <sup>2</sup> Or 3229 Ft <sup>2</sup> |
| 噪音 Noise:                                  | 45 Db                                      |
| 冷却方式 Cooling Method:                       | Air Cooled                                 |
| 气源 Gas Source:                             | Ambient Air                                |
| 净重 Net Weight:                             | 2.4 Kg                                     |
| 毛重 Gross Weight:                           | 2.9 Kg                                     |
| 产品尺寸 Product Size:                         | L213XW175XH157 Mm                          |
| 包装尺寸 Packing Size:                         | 300X250X230 Mm (1PCS/BOX)                  |
| 工作环境温度 Working Temp:                       | -10℃~+50℃                                  |
| 存放环境温度 Storage Temp:                       | -20℃~+60℃                                  |
| 工作环境湿度 Working Humidity:                   | 10%~90% , 95°F (35℃)                       |